

FIG.1

FIG.2

FORMAL LANGUAGE PATTERN	MEANING
URL=< //	REFUSE REQUEST IN WHICH START OF URL CORRESPONDS TO "/"
CGI==phf ARG=<Qname=root%OA	REFUSE REQUEST IN WHICH CGI NAME IS "phf" AND START OF ARGUMENT CORRESPONDS TO "Qname=root%OA"
URL<>..%.%.%.%.%	REFUSE REQUEST IN WHICH URL INCLUDES ".%.%.%.%."
CGI>=.htr	REFUSE REQUEST IN WHICH END OF CGI NAME CORRESPONDS ".htr" THAT IS, REFUSE REQUEST IN WHICH CGI HAS EXTENSION CODE ".htr"

FIG.3

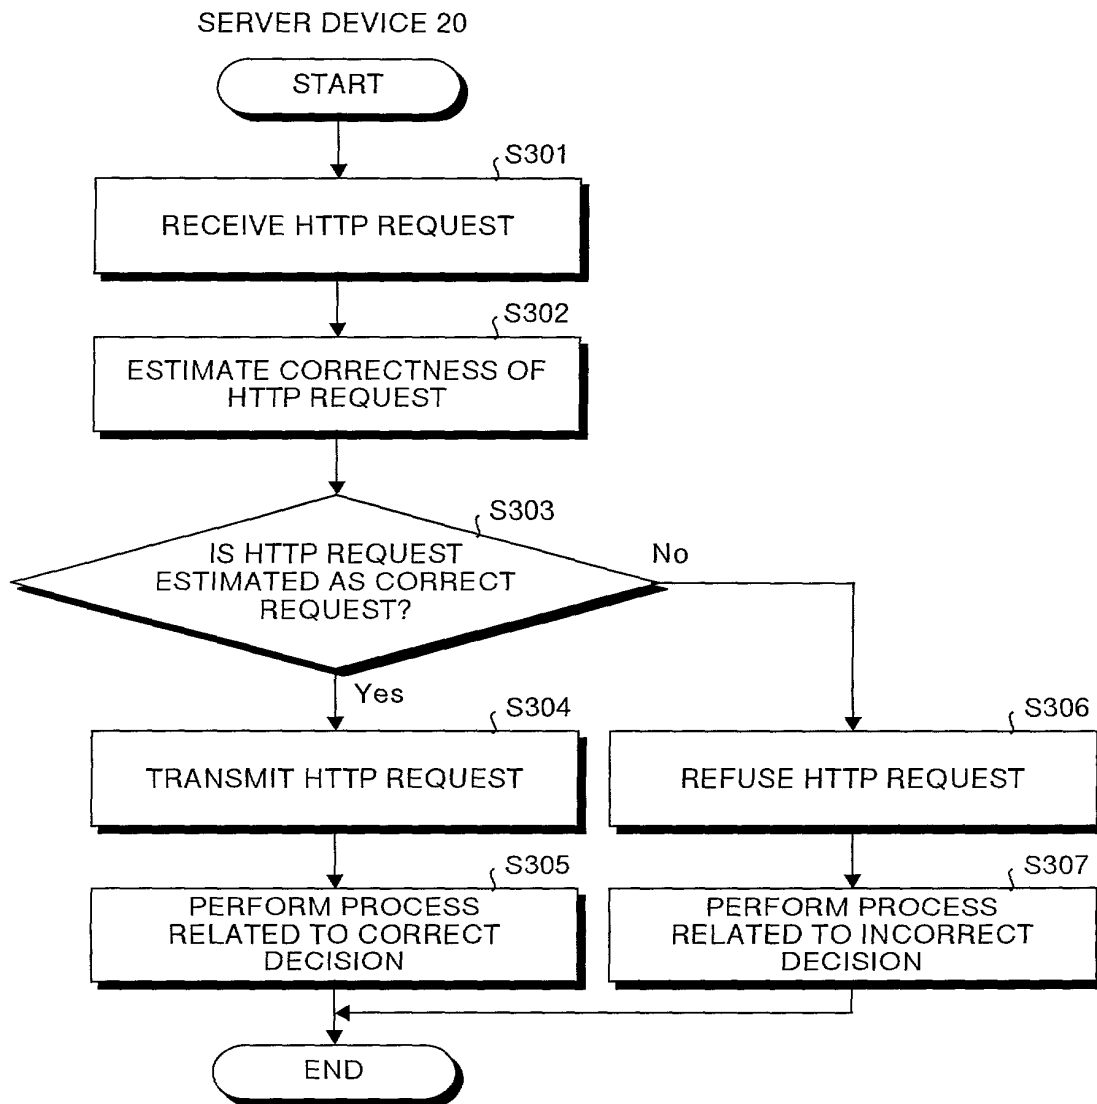


FIG.4

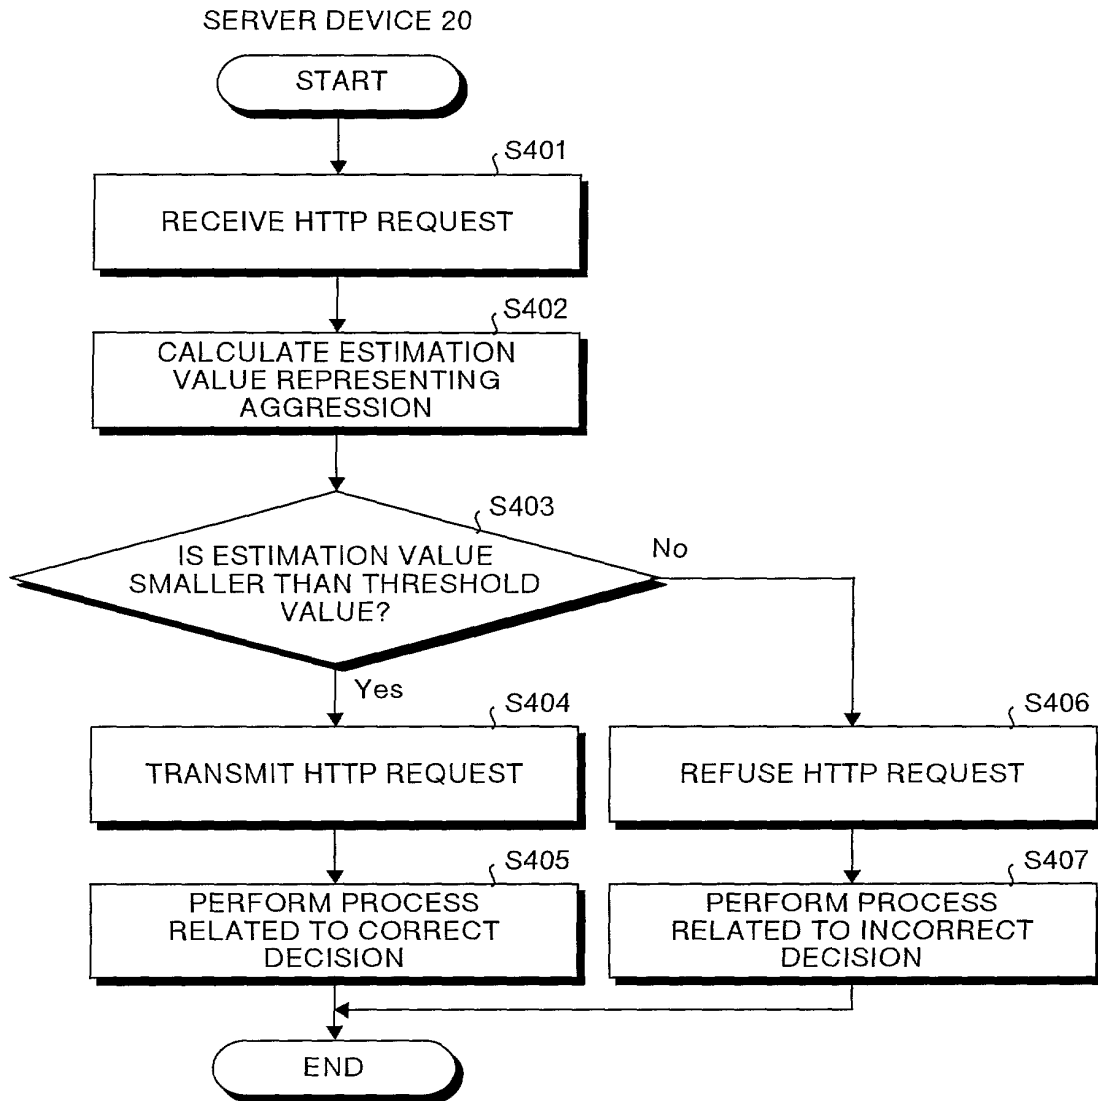


FIG. 5

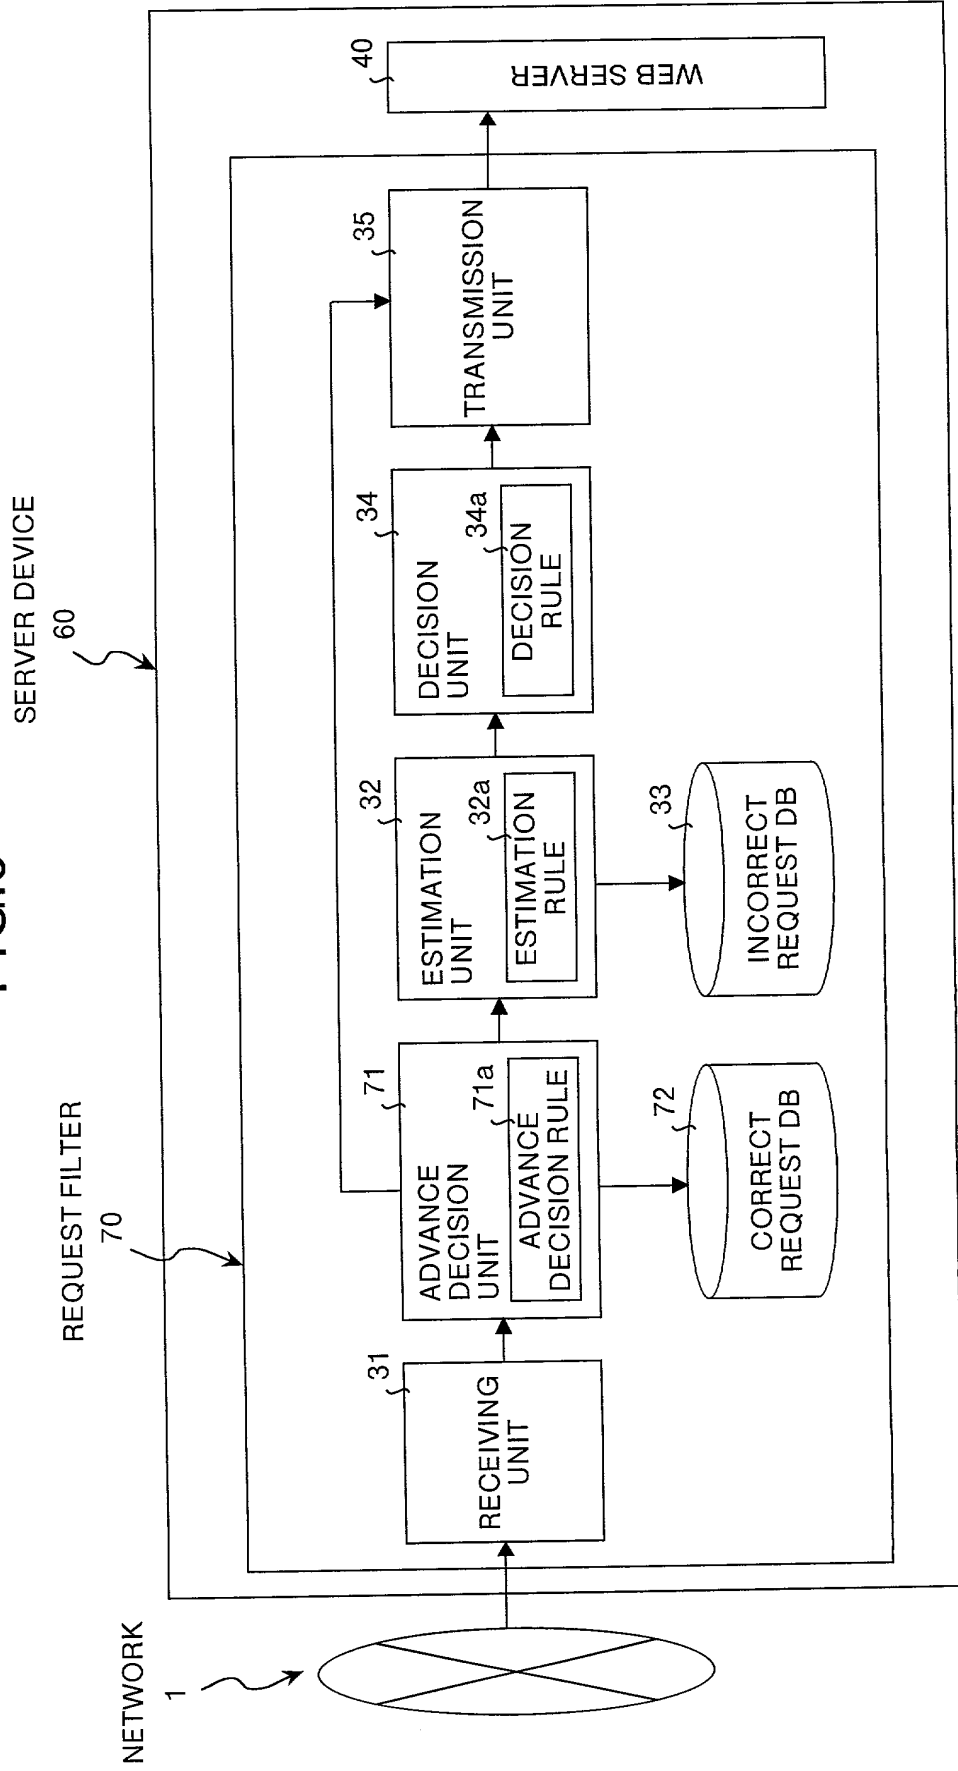


FIG.6

